

# CoaXPress Multi-Link Multi-Stream Device IP 1.1.1

## Xilinx & Intel FPGA Core IP

### PRODUCT BRIEF

CoaXPress Device IP from EASii-IC enables the transmission of video streams from multiple cameras on single or multiple coaxial cables over 40 meters at a maximum transfer rate of 50 Gbps or 200 meters at a maximum transfer rate of 10 Gbps. Each coaxial cable provides a high-speed downlink connection video transfer rate from 1.25 Gbps to 6.25 Gbps and a low-speed uplink connection at 20.83 Mbps for communication and control.

#### ABOUT COAXPRESS

CoaXPress standard defines a cost effective and easy interfacing between video devices and acquisition hardware over RG59 and RG6 coaxial cables. It enables hot-plug of devices and 24V power-over-cable with up to 13 Watts per cable.

A device can support multiple cameras of many video stream formats. Video streams are sent to a host at a selectable high-speed downlink connection rate from 1.25 Gbps to 12.5 Gbps per cable, with up to 8 cables per device to increase the total bandwidth to 100 Gbps.

Device and cameras can be controlled from a host through the uplink connection at 41.66 Mbps. The standard also provides a low latency, accurate trigger interface between device and host.

CoaXPress supports GenICam international standard, providing a generic programming interface for all kinds of cameras regardless of the interface technology.

#### APPLICATIONS AND DOMAINS


##### Vision systems requiring

- High-resolution and high-speed digital cameras
- Real-time image acquisition
- Pixels on target
- Long distance cables with excellent EMI/EMC performance

##### Domains

- Machine vision
- Military and aerospace
- Aerial mapping and traffic management
- Security

#### TYPICAL USE CASE

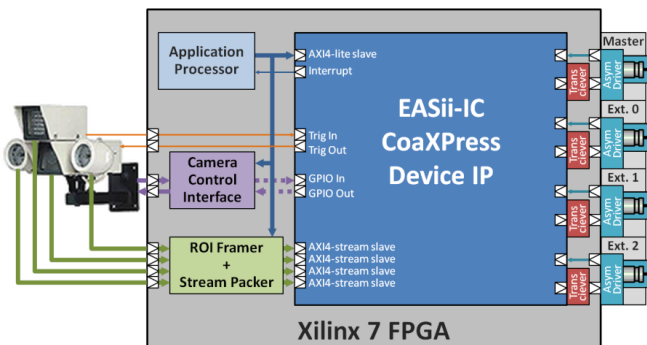

#### EASII IC CXP DEVICE CORE IP FEATURES

- JIAA CXP-001-2013 CoaXPress 1.1.1 compliant
- Selectable downlink connection rates, from 1.25 Gbps to 6.25 Gbps, up to 8 coaxial connections per Device IP
- Supports multiple video-streams, up to 256 independent stream IDs
- Supports all GenICam compliant image formats: rectangular and arbitrary shaped, area and line scan, single and multi tap, multiple regions of interest, all standard pixel for-mats
- Trigger in/out interface with uplink latency of 3.4μs
- Optional 8in/8out GPIO interface compliant with JIAA NIF-001-2010 CoaXPress 1.0 standard
- AXI4-lite slave processor interface for application specific control between host and cameras (optional)
- Up to 4 AXI4-stream slave interfaces for video streams
- Xilinx 7-Series/UltraScale compatible, Intel 10-Series compatible, IP-XACT support

#### PRODUCT DETAILS

- Master connection with up to 7 extension connections
- Embedded connection management: sync, init, soft-reset
- Dynamic reconfiguration: bit-rate, number of connections
- Embedded CRC management and error correction
- Video-stream data packet size up to 4096 bytes
- Up to 4 video-stream interfaces AXI-stream slave 256-bit, running at up to 200 MHz (independent from system-clock)
- Embedded management of triggers and optional GPIOs
- Embedded bootstrap registers
- μProcessor interface AXI4-lite slave 32-bit


#### DELIVERABLES

- Single or multi-use license
- Encrypted source code: VHDL RTL with synthesis scripts for Xilinx Vivado or Intel Quartus
- Comprehensive documentation package: specification, integration, IP-XACT component, etc.
- Integration test-suite

# CoaXPress Multi-Link Multi-Stream Device IP 1.1.1

Xilinx & Intel FPGA Core IP

## CORE IP ARCHITECTURE

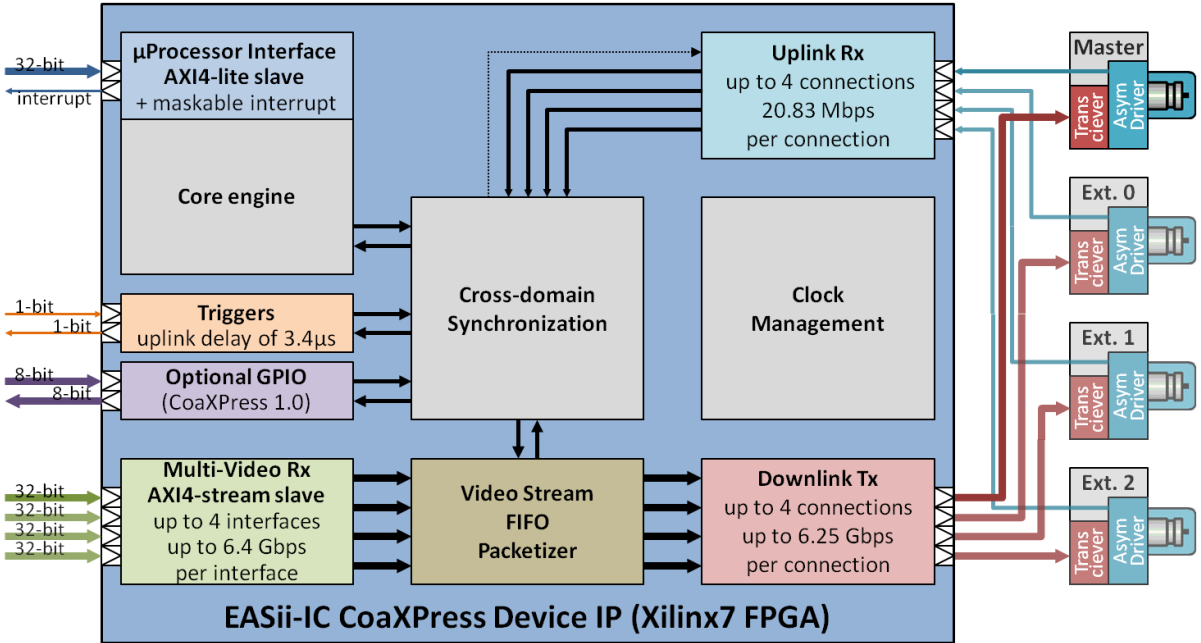

## CORE IP RESSOURCES

### Core IP Resources on Xilinx 7-series

Number of CoaXPress links	1	1	4	4
Number of AXI4-stream interfaces (32-bit wide)	1	4	1	4
Flip-Flops	7057	10481	11284	15812
LUT	7383	13440	13298	21299
BRAM 36Kb	10	13	16	28
DSP48	1	1	1	1

## CONTACT US

For more information on EASii-IC CoaXPress products, technical support or ordering:

Phone : +33 456 580 580

Fax : +33 456 580 599

E-mail : [coaexpress@easii-ic.com](mailto:coaexpress@easii-ic.com)

### Corporate Information

EASii IC SAS

Headquarters : 90, avenue Leon Blum · FR-38100 Grenoble · France

Share capital : 1 000 000 €

RCS Grenoble 389 019 274 – APE 6202A

Intracommunity VAT number : FR06389019274

V3.0 – 10\_21

